
















GoodWe Wifi instellingen

1. Uitleg bij de verschillende mogelijke lampjes op de omvormer:


De gele / groene / rode lampjes hebben de volgende betekenis:  /  / 

Lampje	Status	Uitleg
 Stroom		Aan = wifi aangesloten / actief
		1 x knipperen = wifi-systeem wordt gereset
		2 x knipperen = geen aansluiting op de router
		4 x knipperen = probleem met de wifi-server
		Langzaam knipperend = RS485 aangesloten
		Uit = wifi niet actief
 Bedrijf		Aan = omvormer stuurt energie
		Uit = omvormer stuurt momenteel geen energie
 Fout		Aan = fout opgetreden
		Uit = geen fout

2. Wifi instellen via de browser

1. Zoek naar het wifinetwerk "Solar-Wifi*" * betekend de laatste 8 cijfers van het serienummer van de omvormer

- Zorg ervoor dat er verder geen andere apparaten met Solar-Wifi verbonden zijn
- Het eerste lampje op de omvormer zou moeten knipperen wanneer u met Solar-Wifi verbindt.


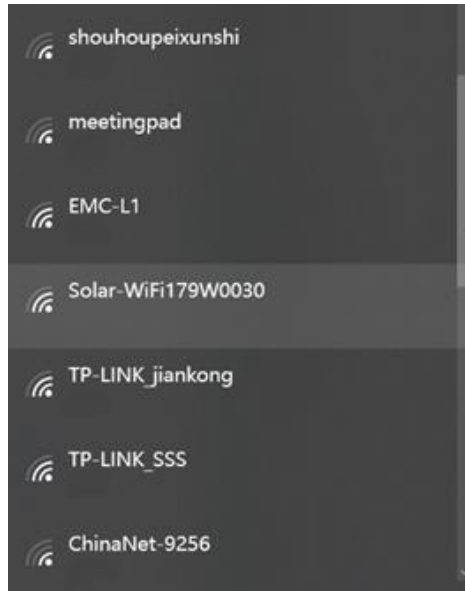


2. Voer de inloggegevens in voor het Wifi-netwerk

- Gebruikersnaam: admin
- Wachtwoord: admin
- Klik op login en maak verbinding met het netwerk

3. Open de browser en ga naar de website: 10.10.100.253

- Gebruikersnaam: admin
- Wachtwoord: admin

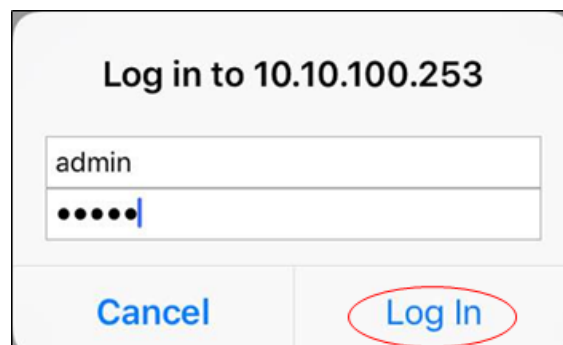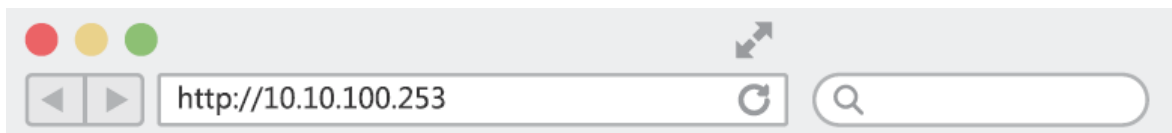

4. Klik op “Start Setup”

Device information	
Firmware version	1.6.9.3.38.2.1.38
MAC address	60:C5:A8:60:33:E1
Wireless AP mode	Enable
SSID	Solar-WiFi
IP address	10.10.100.253
Wireless STA mode	Disable
Router SSID	WiFi_Burn-in
Encryption method	WAP/WAP2-PSK
Encryption algorithm	AES
Router Password	WiFi_Burn-in

Cannot join the network, may be caused by:
router doesn't exist, or signal is too weak, or password is incorrect

★ **Help:** Wizard will help you to complete setting within one minute.

Start Setup

5. Selecteer uw Wifinetwerk SSID en klik op volgende

Please select your current wireless network:

SSID	Sec mode	Enc type	Channel	RSSI
<input checked="" type="radio"/> WiFi Test	WAP2-PSK	AES	6	54%

★ **Note:** When RSSI of the selected WiFi Network is lower than 50%, the connection may be unstable, please select other available network or shorten the distance between the device and the router.

If your wireless router does not broadcast SSID, please click "Next" and add a wireless network manually.

Back **Next**

6. Voer het Wifinetwerk wachtwoord in en klik op “Next”

Add wireless network manually

Network name (SSID)	WiFi-Test
Encryption method	WPA/WPA2-PSK
Encryption algorithm	AES

Please enter the wireless network password:

Password (8-63 bytes)	hellogoodwe
-----------------------	-------------

show psk

★ **Note:** case sensitive for SSID and password
Please make sure all parameters of wireless network are matched with router, including password

Back **Next**

7. Voltooi het proces door op “Complete” te klikken